


ANTI-RATTLE INSTALLATION INSTRUCTIONS

L.E.D Hitch Step
BBS-1104L


1

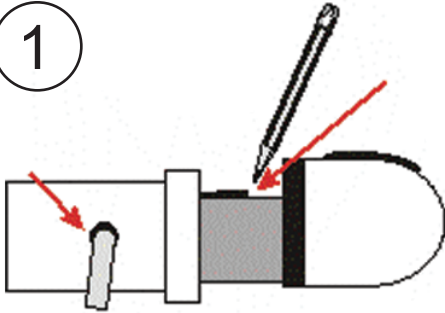

1. INSERT THE HITCH STEP AND PLACE YOUR HITCH PIN IN POSITION. PUSH THE ANTI-RATTLE HITCH STABILIZER INTO THE HITCH RECEIVER TIGHTLY TO FILL UP THE GAP ON THE TOP OF THE BAR.

1. INSERTE EL ESCALON DEL ENGACHE Y COLOQUE EL PERNO EN POSICION EMPUJE EL ESTABILIZADOR DENTRO DEL RECIBIDOR DEL ENGANCHE LO MAS APRETADO POSIBLE PARA LLENAR EL ESPACIO ENTRE ESTE Y LA BARRA.


2

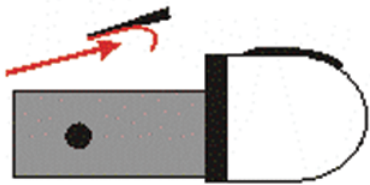

2. MARK THE EXACT POSITION AND REMOVE THE HITCH STEP FROM YOUR RECEIVER. REMOVE THE 3M TAPE BACKING ON THE ANTI-RATTLE HITCH STABILIZER AND REPOSITION THE SHIM 1/16" IN FRONT OF YOUR MARKED POSITION. PRESS DOWN ON THE SHIM FIRMLY TO ENSURE A SECURE MOUNT.

2. MARQUE LA POSICION EXACTA Y RETIRE EL ESCALON DEL RECIBIDOR. RETIRE EL PLASTICO QUE CUBRE LA CINTA 3M DEL ESTABILIZADOR Y COLOQUELO 1/16" ENFRENTE DE LA MARCA QUE USTED REALIZO. PRESIONE CONTRA LA BARRA FIRMEMENTE PARA ASEGURAR EL MONTAJE.

3

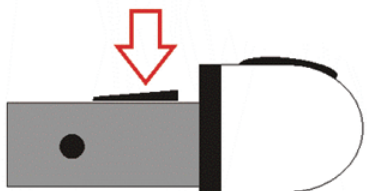

3. NOW YOU ARE READY TO RE-INSERT YOUR HITCH STEP BACK INTO THE HITCH RECEIVER AND SECURE IT WITH A BULLY HITCH PIN LOCK (#CR-094)

3. PRESIONE CONTRA LA BARRA FIRMEMENTE PARA ASEGURAR EL MONTAJE. AHORA USTED ESTA LISTO PARA REINSERTAR EL ESCALON DE REGRESO EN EL RECIBIDOR Y ASEGURARLO CON EL CANDADO BULLY (#CR-094)

THE ANTI RATTLE HITH STABILIZER WILL ELIMINATE ANNOYING HITCH BOX AND HITCH MOUNT CHATTERING RATTLES WHILE YOU DRIVE.

EL ESTABILIZADOR ELIMINARA LA ENFADOSA VIBRACION ENTRE LA CAJA DEL ENGANCHE Y LA BARRA MINETRA USTED CONDUCE.


WIRING INSTRUCTIONS

L.E.D Hitch Step
BBS-1104L



Installation Instructions:

1. Identify the correct mounting shaft size needed for your application.
(2" Receiver) make sure large sleeve is installed on mounting shaft.
(1 1/4" Receiver) remove large sleeve from mounting shaft.
2. Identify and align correct mounting hole on Hitch step with the factory hitch, apply appropriate size hitch pin (Not supplied).
Note: It is recommended that a locking hitch pin be used to prevent theft.
3. For proper wiring installation, we suggest that you convert your vehicle's hitch end wire to a 4-Way Flat Connector (Vehicle end) before you install the LED hitch step. The conversion harness (as simulated below) is available at any auto parts store.
4. Once installation complete, make sure lighting functions are working properly.

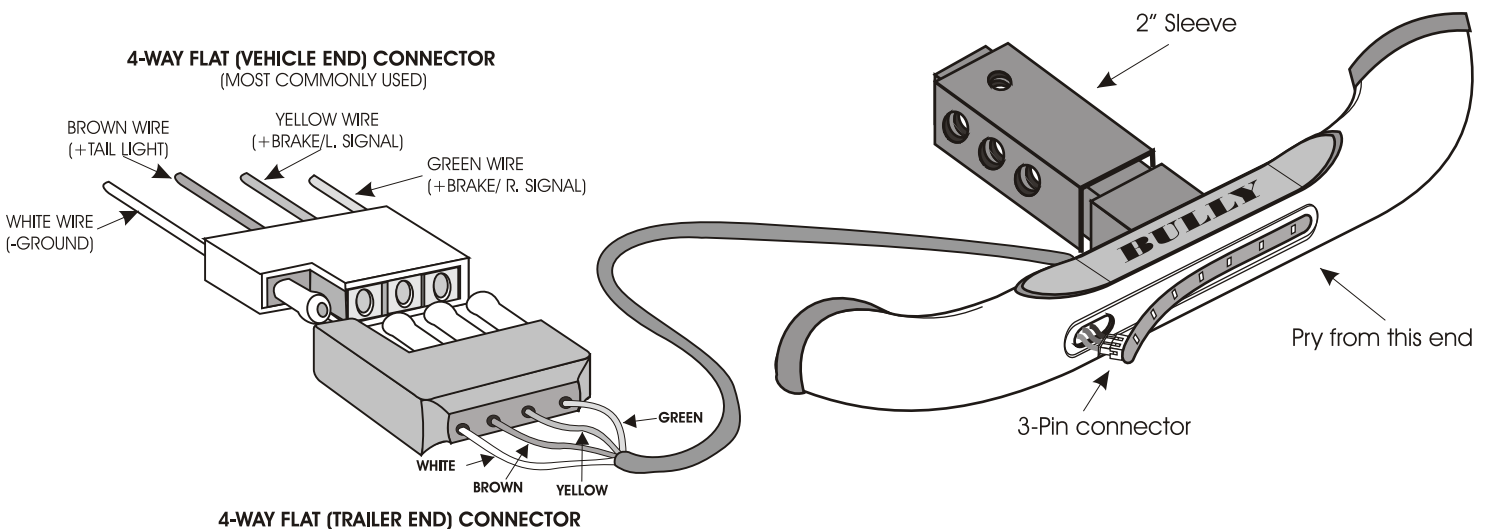

LED Replacement Instructions:

1. To replace the LED strip; gently pry the strip from the right side.
2. Disconnect the 3-pin connector and remove the LED strip.
3. Clean area thoroughly with rubbing alcohol or water.
4. Connect LED strip the way as removed from the original part.

Technical Help:

Toll Free: 1-800-237-7560

Email: customerservice@pilotautomotive.com

LED Replacement No: CR-600L-LED